



IECEX

FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

English

ISSUED: 2015.07.16

V3

Description:

SF-3 is a portable, hand-held intrinsically safe flashlight for use in hazardous locations and can be powered with four size AA alkaline or NiMH cells. It has high and low mode operating functions that allows users to operate for high brightness or long duration lighting. This device is light weight but sustains high impacts and drops.

Features:

- Intrinsically safe for use in hazardous locations
- High and Low mode functions
- Users high power CREE LED
- Tough and durable casing
- High efficient heatsink
- Screw fastener for safety precautions
- Build-in gas release vent

Certifications:



Class I Div 1 Grp ABCD / Class II Div 1 Grp EFG
Class III / Temperature Code T4 IP6X
File number: E324236



II 1G Ex ia IIC T4 IP6X
DEMKO 13 ATEX 1302999X

IECEX

Ex ia IIC T4 Ga IP6X
IECEX UL 13.0013X



0518

DAY SUN TECHNOLOGY LTD.
Address: 1st FL, No.1, Alley 2, Lane 110, Sec.4, Hsimen Rd.
North District, Tainan, 704 Taiwan

Standards:

1. UL 913, Seventh Edition
2. CSA C22.2 No.157-92, Reaffirmed 2012
3. EN 60079-0 : 2009 Edition
4. EN 60079-11 : 2012 Edition
5. EN 60079-26 : 2007 Edition
6. IEC 60079-0 : Fifth Edition
7. IEC 60079-11 : Sixth Edition
8. IEC 60079-26 : Second Edition

Battery Replacement:

Use only battery types below:

Alkaline type

Energizer E91

Duracell MN1500

Rayovac 815

Ansmann 5015548

Ansmann 1502-0002

NiMH type


Energizer NH15-2300

- Warning: Do not open in hazardous locations.
- Warning: To reduce the risk of explosion do not mix new batteries with used batteries, or mix batteries from different manufacturers or from different types.
- Warning: Do not charge NiMH batteries in the flashlight. Charge the NiMH batteries according to the manufacturer's specification.
- Warning: Remove the batteries when unused for a period of time to prevent battery leakage in the device.

Safety Warnings:


1. The screw shall be secured tightly after opening and closing of the enclosure.
2. Substitution of components may impair intrinsic safety.
3. Clean the flashlight only with damp cloth to avoid static electricity.
4. Do not flash the light beam directly to human's eyes.
5. Always use the device following the regulations of each country.

Installation:

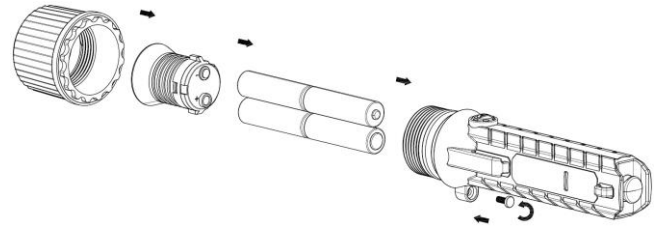

Operation:

Push rear button to operate. The sequence is high and the low mode.

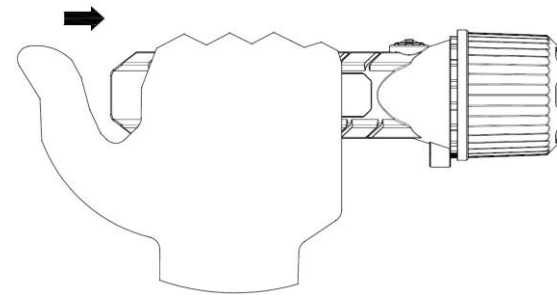

Accessories:

- Hand Straps
- Helmet Clamps

Warranty:

1 years Limited Warranty

Specification: (Factory Standard)



| Specs | High mode | Low mode |
|-----------------|------------------|----------------|
| Light Output | 120 lm | 31 lm |
| Run Time | 6 hr | 69 hrs 10 mins |
| Beam Intensity | 7396 cd | 1807 cd |
| Beam Distance | 172 m | 85 m |
| Drop Resistance | 1 meter | |
| IP Rating | IP67 | |
| Dimension | 174 x 47 x 47 mm | |
| Weight | 115 g | |

SÉCURITÉ INTRINSÈQUE:

1. AVERTISSEMENT : LA SUBSTITUTION DE COMPOSANTS PEUT COMPROMETTRE LA SÉCURITÉ INTRINSÈQUE.
2. AVERTISSEMENT : AFIN DE PRÉVENIR L'INFLAMMATION D'ATMOSPHÈRES DANGEREUSES, NE CHANGER LES BATTERIES QUE DANS DES EMPLACEMENTS DÉSIGNÉS NON DANGEREUX.